

## LOCTITE® EA 9484

 Known as Hysol 9484  
November 2014

### PRODUCT DESCRIPTION

LOCTITE® EA 9484 provides the following product characteristics:

<b>Technology</b>	Epoxy
Chemical Type (Resin)	Epoxy
Chemical Type (Hardener)	Polyamide
Appearance (Resin)	Light colored paste
Appearance (Hardener)	Gray paste
Appearance (Mixture)	Gray paste
Viscosity	Medium
Components	Two part - Resin & Hardener
Mix Ratio, by volume - Resin : Hardener	1 : 1
Mix Ratio, by weight - Resin : Hardener	100 : 85
<b>Cure</b>	Room temperature cure after mixing
<b>Application</b>	Bonding
Key Substrates	Plastics, Metals, Glass, Wood, Ceramics, Rubbers and Masonry materials
Maximum Gap	3.0 mm

LOCTITE® EA 9484 is a tough, medium viscosity, industrial grade epoxy adhesive with a medium work life. Once mixed the two-part epoxy cures at room temperature to form a flexible gray bondline with excellent resistance to shock and impact. The fully cured epoxy is resistant to a wide range of chemicals and solvents, and acts as an excellent electrical insulator. LOCTITE® EA 9484 is suited for low-stress, high-impact bonding applications of dissimilar materials. It can be used for repairing strain gauges, sealing seams on fiberglass components, repairing printed circuit boards, bonding stainless steel inserts, and rubber hose to steel tubing.

### TYPICAL PROPERTIES OF UNCURED MATERIAL

#### Resin Properties

Specific Gravity @ 25 °C	1.3
Viscosity, Brookfield - RVT, 25 °C, : Spindle 7., speed 10 rpm,	60,000 to 175,000
Viscosity, DIN 54453, mPa·s (cP): Shear rate 10 s <sup>-1</sup>	70,000
Flash Point - See SDS	

#### Hardener Properties

Specific Gravity @ 25 °C	1.1
Viscosity, Brookfield - RVT, 25 °C, mPa·s (cP): Spindle 7., speed 10 rpm,	60,000 to 120,000
Viscosity, DIN 54453, mPa·s (cP): Shear rate 10 s <sup>-1</sup>	42,000
Flash Point - See SDS	

#### Mixed Properties

Specific Gravity @ 25 °C	1.2
Viscosity, Brookfield - RVT, 25 °C, mPa·s (cP): Spindle 7., speed 10 rpm,	70,000 to 150,000
Pot Life @ 22 °C, minutes: 100 g mass	40

### TYPICAL CURING PERFORMANCE


#### Fixture Time

Fixture time is defined as the time to develop a shear strength of 0.1 N/mm<sup>2</sup>.

Fixture Time, mixed, @ 22 °C, minutes	180
---------------------------------------	-----

#### Cure Speed

The following graph indicates development of shear strength on mild steel (grit blasted) lapshears as a function of time and temperature tested according to ISO 4587.

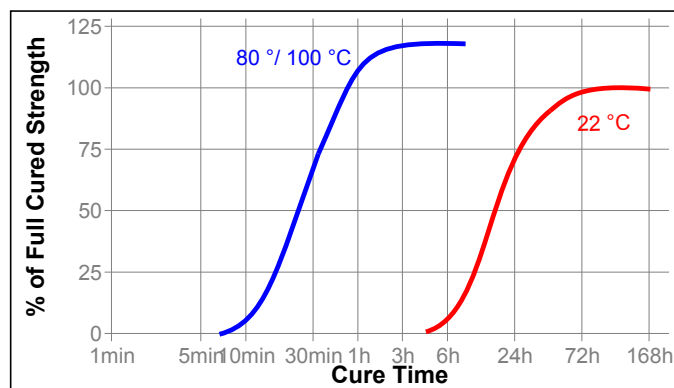

**TYPICAL PROPERTIES OF CURED MATERIAL**

Cured for 7 days @ 22 °C

**Physical Properties :**

Coefficient of Thermal Expansion ISO 11359-2, K<sup>-1</sup>:  
 Temperature Range: 16 °C to 39 °C 62×10<sup>-6</sup>  
 Temperature Range: 47 °C to 199 °C 157×10<sup>-6</sup>

Shore Hardness, ISO 868, Durometer D 55  
 Glass Transition Temperature, ASTM D 1640, °C 56  
 Elongation , ISO 527-3,% 50  
 Tensile Strength, ISO 527-3 N/mm<sup>2</sup> 15  
 (psi) (2,200)  
 Tensile Modulus , ISO 527-3 N/mm<sup>2</sup> 161  
 (psi) (23,000)

**Electrical Properties:**

Dielectric Breakdown Strength IEC 60243-1, kV/mm 15.6

**TYPICAL PERFORMANCE OF CURED MATERIAL**

Cured for 3 days @ 22 °C

Lap Shear Strength , ISO 4587:

Mild steel (grit blasted) N/mm<sup>2</sup> 25  
 (psi) (3,600)  
 Aluminum (anodised) N/mm<sup>2</sup> 6.3  
 (psi) (910)  
 Aluminum (etched in acidic ferric sulphate) N/mm<sup>2</sup> 6.8  
 (psi) (990)  
 Stainless steel N/mm<sup>2</sup> 13  
 (psi) (1,900)  
 Galvanized Steel (Hot Dipped) N/mm<sup>2</sup> 20  
 (psi) (2,900)  
 Polycarbonate N/mm<sup>2</sup> 3.8  
 (psi) (550)  
 Nylon N/mm<sup>2</sup> 2.6  
 (psi) (380)  
 Wood (Fir) N/mm<sup>2</sup> 6.6  
 (psi) (960)  
 ABS N/mm<sup>2</sup> 4.2  
 (psi) (610)  
 GRP (polyester resin matrix) N/mm<sup>2</sup> 6.2  
 (psi) (900)  
 Glass Fiber Reinforced Epoxy N/mm<sup>2</sup> 10  
 (psi) (1,500)

Tensile Strength , ISO 6922:

Mild steel (grit blasted) to Soda glass N/mm<sup>2</sup> 16  
 (psi) (2,300)

180° Peel Strength, ISO 8510-2:

Mild steel (grit blasted) N/mm 1.3  
 (lb/in) (7.4)

**TYPICAL ENVIRONMENTAL RESISTANCE**


Cured for 5 days @ 22 °C

Lap Shear Strength , ISO 4587:

Mild Steel (grit blasted)

**Hot Strength**

Tested at temperature

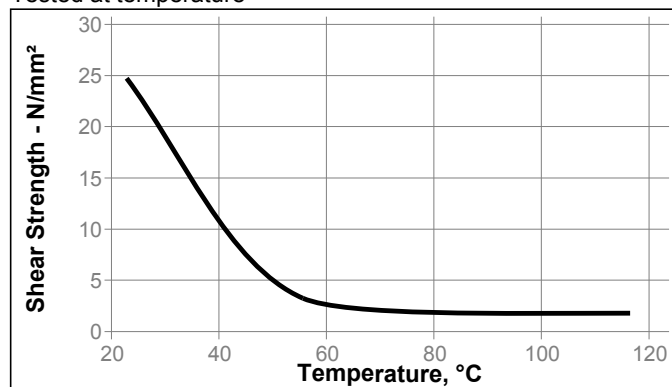**Heat Aging**

Stored at temperatures indicated and tested at 22°C.

Temperature	% Initial strength retained after	
	500 h	1,000 h
80 °C	100	115
100 °C	110	115
120 °C	130	120

**Chemical/Solvent Resistance**

Immersed in conditions indicated and tested at 22 °C.

Environment	°C	% of initial strength	
		500 h	1000 h
Unleaded gasoline	22	60	75
Water/glycol 50/50	87	45	40
Salt/Fog ASTM B-117	22	25	5
98% RH	40	5	2
Condensing Humidity	49	60	55
Water	22	50	0
Acetone	22	0	0
Isopropanol	22	70	60

**Chemical/Solvent Resistance**

Immersed in conditions indicated and tested at 22 °C

Tensile Strength , ISO 6922:

Mild steel (grit blasted) to Soda glass

Environment	°C	% of initial strength	
		500 h	1000 h
Air	22	90	80
98% RH	40	5	5

**GENERAL INFORMATION**

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

Where aqueous washing systems are used to clean the surfaces before bonding, it is important to check for compatibility of the washing solution with the adhesive.

**Directions for use**

1. For best performance surfaces for bonding should be clean, dry and free of grease. For high strength structural bonds, special surface treatments can increase the bond strength and durability.
2. To use, resin and hardener must be blended. Product can be applied directly from dual cartridges by dispensing through the mixer head supplied. Discard the first 3 to 5 cm of bead dispensed. Using bulk containers, mix thoroughly by weight or volume in the proportions specified in the Product Description Matrix. For hand mixing, weigh or measure out the desired amount of resin and hardener and mix thoroughly. Mix approximately 15 seconds after uniform color is obtained.
3. Do not mix quantities greater than 500 g in mass as excessive heat build-up can occur. Mixing smaller quantities will minimize the heat build-up.
4. Apply the adhesive as quickly as possible after mixing to one surface to be joined. For maximum bond strength apply adhesive evenly to both surfaces. Parts should be assembled immediately after mixed adhesive has been applied.
5. Working life of the mixed adhesive is 40 minutes at 22 °C. Higher temperature and larger quantities will shorten this working time.
6. Keep the assembled parts from moving during cure. The joint should be allowed to develop full strength before subjecting to any service loads.
7. Excess uncured adhesive can be wiped away with organic solvent (e.g. Acetone).
8. After use and before adhesive hardens, mixing and application equipment should be cleaned with hot soapy water.

**Not for product specifications**

The technical data contained herein are intended as reference only. Please contact your local quality department for assistance and recommendations on specifications for this product.

**Storage**

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

**Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties.**

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

**Conversions**

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$   
 $\text{kV/mm} \times 25.4 = \text{V/mil}$   
 $\text{mm} / 25.4 = \text{inches}$   
 $\text{N} \times 0.225 = \text{lb}$   
 $\text{N/mm} \times 5.71 = \text{lb/in}$   
 $\text{N/mm}^2 \times 145 = \text{psi}$   
 $\text{MPa} = \text{N/mm}^2$   
 $\text{MPa} \times 145 = \text{psi}$   
 $\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$   
 $\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$   
 $\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$   
 $\text{mPa}\cdot\text{s} = \text{cP}$

## Disclaimer

### Note:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:**

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

**In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada Corporation, the following disclaimer is applicable:**

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

### Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

## Reference 1.2